FLOOR SAWS

FULLY HYDRAULIC SERIES

For long and extensive cutting work in concrete or asphalt with high efficiency

CF-6022

Order no. 50010324

Technical data		CF-6022
Max. cutting depth	mm	480
Blade-Ø	mm	300 - 1200
Bevel cut		stepless to 20 degrees
Speed of cutting shaft	min^{-1}	930 - 2800
Bore hole of blade	mm	35 + 6-hole
Blade mounting		right or left
Max. mounting width	mm	13
Max. motor output	kW / PS	55,4 / 75,3
Motor output (net)*	kW	55,4* / 2800 min^{-1}
Motor type diesel		Hatz 4H50TIC
Motor starter		electric starter
Cutting depth adjustment		electro-hydraulic
Feed		hydraulic
Dimensions L/W/H (transport)	mm	2900 / 950 / 1840
Weight	kg	ca. 1400

* according to operating instructions motor

- stage V (EU) / TIER 4 (Final) Common-Rail Diesel
- incl. blade guard 1200 mm (other sizes on request)
- fully hydraulic drive of all working functions
- mounting of saw blade possible on right or left side
- infinitely variable cutting shaft speed
- standard auxiliary hydraulics for driving an suction plant

Accessories CF-6022

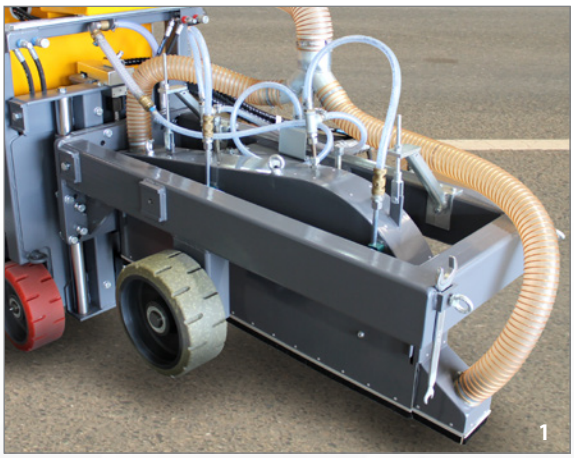

Pos.	Description	Order no.
--	Normal blade guard for saw blade-Ø 1200 mm	70002602
--	Suction blade guard for saw blade-Ø 1000 mm	30000014
--	Suction blade guard for saw blade-Ø 1200 mm	30000015
--	Set of lamps, 2 worklights with support tube	30000021
--	LED worklight with magnetic holder	50001784
--	Rotating beacon 12 V with standpipe	30001166
--	LED-Rotating beacon 12 V with standpipe	50010748
1	Longitudinal attachment **LS-2**	30001059
2	Green concrete attachment	50005167
3	Milling/grooving attachment width 600 mm	50012117
--	Suction blade guard for milling/grooving attachment 600 mm	30000003
4	Suction plant type 6.2 hydraulic	50009742
5	Core drilling machine attachment	30000010

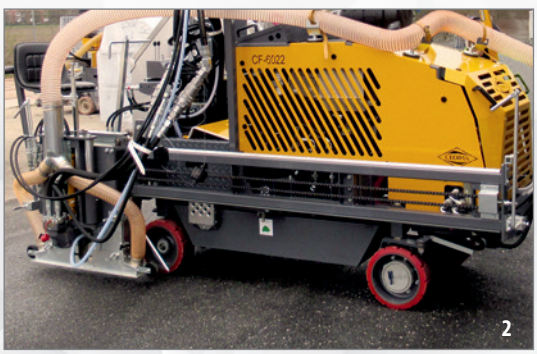

Similar pictures!