

Medium-size floor saws with latest **exhaust emission standard stage 5** suitable for cutting in narrow building sites or areas difficult to access up to heavy-duty use on building sites with high daily output

CF-4030 D

Order no.. 50009738




Technical data		CF-4030 D
Max. cutting depth	mm	210 - 410
Blade-Ø	mm	600 - 1000
Speed of cutting shaft		variabel
Bore hole of blade	mm	35 + 6-hole
Blade mounting		right or left
Max. mounting width	mm	20
Max. motor output	kW / PS	45 / 61,2
Motor output (net)*	kW	45*
Motor type diesel		HD Doosan D18
Motor starter		electric starter
Cutting depth adjustment		electro-hydraulic
Feed		hydraulic
Dimensions L/W/H (transport)	mm	1625 / 1275 / 1295
Weight	kg	980

* according to operating instructions motor

Delivery inclusive:

- blade guard 1000 mm
- water pump
- latest exhaust emission standard stage 5
- telescopic visor
- cutting shaft set for Ø 600 - 1000 mm
- electrical cutting depth measurement
- hydraulic steering
- fail-safe parking brake

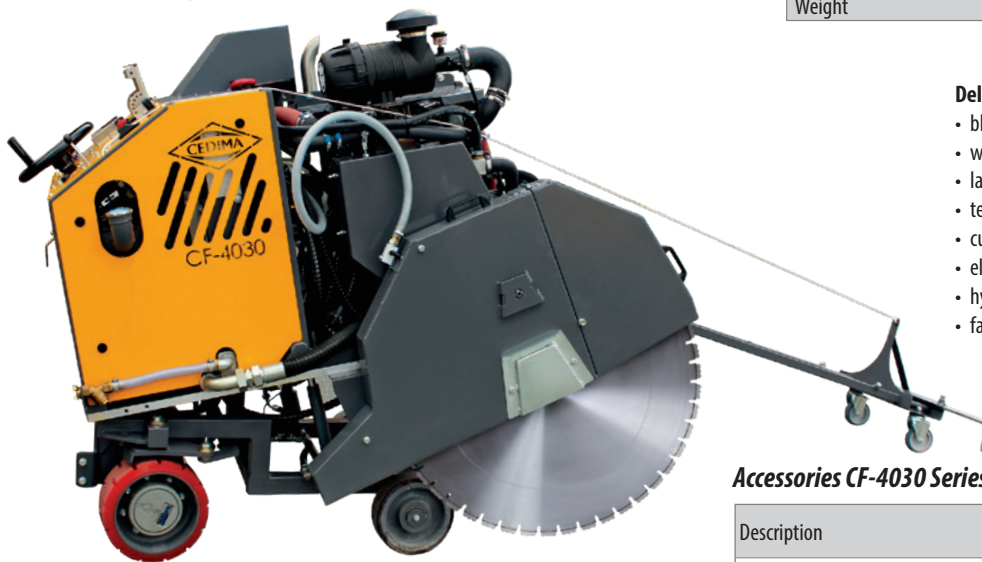

Accessories CF-4030 Series

Description	Order no.
Footboard and adjustable seat	50003273
LED work light with magnetic holder	50001784

CF-4030 DF

Order no. 50014364

Green concrete version

Only for new orders!

Additionally with:

- hydraulic suction plant type 5.5
- suction blade guard 600 mm
- adapted speed range for the cutting shaft

NEW



CF-4030 DF with suction plant and footboard with seat