


PROFESSIONAL USE - FLOOR SAWS - ASPHALT

FSA 10

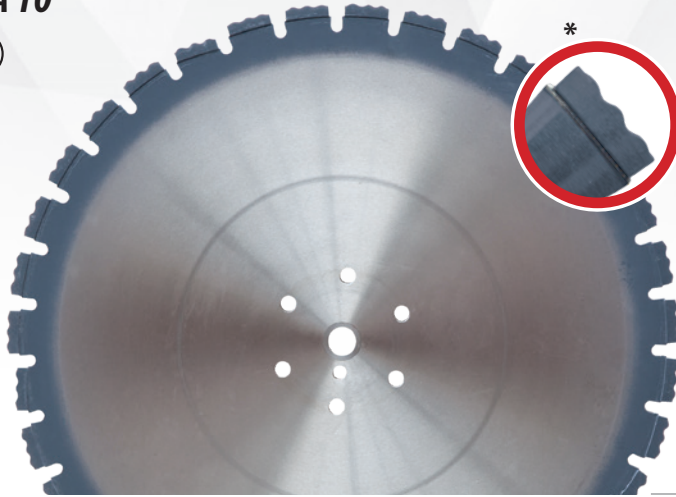


Order no.	Ø -mm-	Bore hole -mm-	Segment W x H x L -mm-	No. of segments
50008287	600	25,4	4,2 x 10 x 40	36
50008432	650	35 / 25,4	4,4 x 10 x 40	36
50008433	700	35 / 25,4	4,4 x 10 x 40	40
50008434	800	35 / 25,4	4,4 x 10 x 40	46
50008435	900	35 / 25,4	4,4 x 10 x 40	52

- application in asphalt and screed with soft to medium-hard aggregates
- suitable for floor saws from 10 kW up to 22 kW engine power
- with hammer diamond protective segments

*) **NEW: With wave-shaped segments for optimum cutting behaviour.**

FSA 18

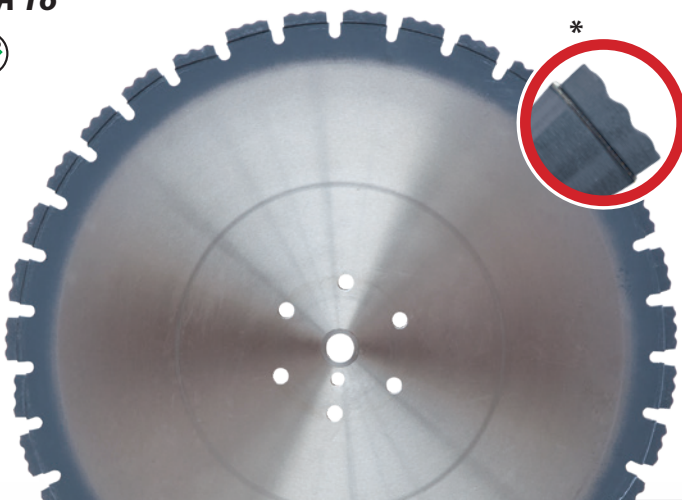


Order no.	Ø -mm-	Bore hole -mm-	Segment W x H x L -mm-	No. of segments
50008436	500	35 / 25,4	3,6 x 10 x 40	28
50008437	500	35 / 25,4	4,4 x 10 x 40	28
50008438	600	35 / 25,4	4,4 x 10 x 40	36
50008439	600	35 / 25,4	3,6 x 10 x 40	36
50008440	700	35 / 25,4	4,4 x 10 x 40	40
50008442	800	35 / 25,4	4,4 x 10 x 40	46
50008443	900	35 / 25,4	4,4 x 10 x 40	52
50008444	1000	35 / 25,4	4,4 x 10 x 40	54
50008445	1200	35 / 25,4	4,4 x 10 x 40	64

- application in asphalt with medium-hard aggregates, high feed, fast cutting
- suitable for floor saws from 18 kW engine power
- with bevelled protective diamond segments
- with 6 additional mounting holes

*) **NEW: With wave-shaped segments for optimum cutting behaviour.**

FSA 25

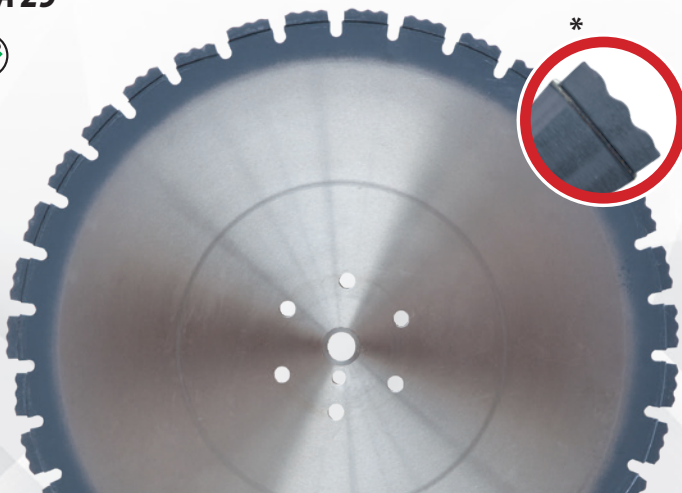

Order no.	Ø -mm-	Bore hole -mm-	Segment W x H x L -mm-	No. of segments
50008446	450	35 / 25,4	4,4 x 12 x 40	28
50008447	500	35 / 25,4	4,4 x 12 x 40	28
50008448	600	35 / 25,4	4,4 x 12 x 40	34
50008449	700	35 / 25,4	4,4 x 12 x 40	40
50008450	800	35 / 25,4	4,4 x 12 x 40	46
50008451	900	35 / 25,4	4,4 x 12 x 40	52
50008452	1000	35 / 25,4	4,4 x 12 x 40	54
50008453	1200	35 / 25,4	4,4 x 12 x 40	64

- application in asphalt with soft to hard aggregates
- suitable for floor saws from 25 kW engine power
- with bevelled diamond segments for protection against undercutting
- with 6 additional mounting holes

*) **NEW: With wave-shaped segments for optimum cutting behaviour.**