


DRILL TRAILER

Drill trailers from cedima are particularly suitable for removing test cores from asphalt or concrete carriageways or for drilling openings for crash barriers. At airports, drill rigs are used to drill stepped holes for the underfloor lighting of runways. Equipped with stainless steel water tanks, Cedima drill rigs drill independently of any supply line.

All Cedima drill trailers have a 100 km/h approval for road traffic.

Drill-Ø up to 600 mm

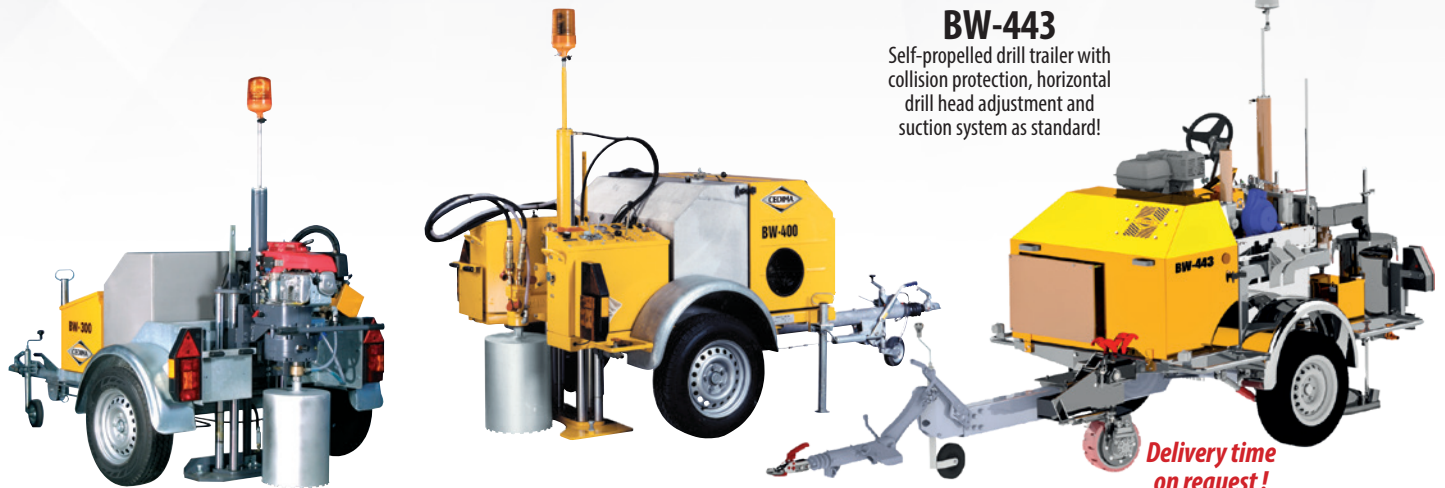

BW-443

Self-propelled drill trailer with collision protection, horizontal drill head adjustment and suction system as standard!

Delivery time on request!

BW-300	BW-400	BW-443	BW-445	Technical data	
30001150	30001137	50008892	50010908		Order no.
400	400 / 600*	400	400	mm	Max. drill-Ø
600	600	600	1100	mm	Max. lifting
550	550	550	1050	mm	Max. usable length of drill bit
1 1/4" UNC-pin	1 1/4" UNC-pin	1 1/4" UNC-pin	1 1/4" UNC-pin		Drill bit connection
7,6	15,5	8,7 + 15,5	6,8 + 15,5	kW	Motor output
Honda GXV-390 (petrol)	Hatz 2 G 40 (diesel)	Honda GXV-390 + Hatz 2 G 40 (petrol) + (diesel)	Yanmar L 1000V + Hatz 2 G 40 (diesel) + (diesel)		Motor type
300	300	300	300	l	Contents water container
mechanical	electric	electric	electric		Water pump
mechanical (2-speed-gear)	hydraulic	hydraulic	hydraulic		Drive of drill bit
3300 / 1660 / 1800	3300 / 1700 / 1830	4541/1815/2470(1870)	4600 / 1900 / 2500	mm	Dimensions L/W/H
700 / 1200	920 / 1500	1300 / 1800	1730 / 2500	kg	Weight (unloading/permissible)
--	--	4.3 mechanical	4.3 mechanical		Suction system
--	--	yes, hydraulic drive	yes, hydraulic drive		Self-driving
optional	optional	--	--		Collision protection

* Distance plate type T required


Now available

for BW-300 and BW-400

Collision protection

(Factory assembly only for new orders!)

Accessories drill trailers

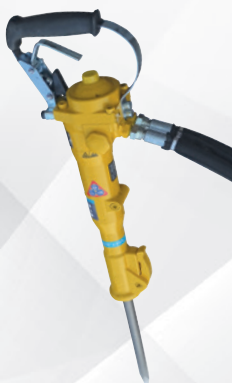

Description	BW type	Delivery	Order no.
Collision protection BW-300 - only assembly at works for new machine order	BW-300	optional	50006393
Centering device BW-300 - only assembly at works for new machine order	BW-300	optional	30000865
Collision protection BW-400 - only assembly at works for new machine order	BW-400	optional	50009367
Centering device BW-400 - only assembly at works for new machine order	BW-400	optional	50009368
Demolition hammer	BW-400	optional	50001132
Conversion kit auxiliary hydraulics for demolition hammer	BW-400	optional	50009971
Hydraulic motor H-100 for drilling Ø 80 - 300 mm in concrete, up to 400 mm in asphalt	BW-400	serial	30001036
Hydraulic motor H-230 for drill-Ø 300 - 600 mm (distance plate type T required)	BW-400	optional	30001035
Distance plate type T for drill-Ø > 400 - 600 mm	BW-400	optional	30000699