

DRILL COLUMNS

Drill-Ø up to 400 mm

NEW




Technical data		H-160 for collar motors	P-250 incl. mounting plates type Z and type U	P-3000 incl. carriage, without dowel foot
Order no.		50013860	30001106	30000599
Max. drill-Ø (with telescopic support)	mm mm	160 --	250 --	300 400
Max. lifting (with longer drill column)	mm mm	600 --	660 --	610 1620
Dimensions L/W/H	mm	470 / 210 / 840	390 / 248 / 970	310 / 220 / 945*
Diagonal drilling		up to 45° infinitely	up to 45° infinitely	up to 45° infinitely
Weight	kg	11	14,1	14,5(UNI) 17 (PROFI)
Recommended drill motors (for further possible combinations, see p. 68)		DKS-15 SP, C-BMH-160, C-BM-17, DK-17	DKS-15 SP, C-BMH-160, C-BM-17, C-BMS-350 C-BM-32, C-BM-32 S, DK-17, DK-32	C-BMS-350, C-BM-32, C-BM-32 S, DK-32, DK-52

*) with dowel foot UNI

Maximum drill-Ø for P-250 / P-3000

	DKS-15	C-BMH-160	C-BM-17	C-BMS-350	C-BM-32	C-BM-32 S	DK-17	DK-32	DK-52
P-250 max. drill-Ø mm (abrasive)	150 (180)	160 (160)	160 (180)	250 (250)	250 (250)	250 (250)	160 (180)	250 (250)	--
P-3000 max. drill-Ø mm with mounting plate Type C	--	--	--	350 UNI 350 Profi	340 UNI 350 Profi	340 UNI 350 Profi	--	340 UNI 350 Profi	340 UNI 370 Profi
P-3000 max. Bohr-Ø mm with mounting plate Type C + 60 mm distance plate Type P	--	--	--	--	350 UNI	350 UNI	--	350 UNI	400

Note: The specified maximum drill diameter can be limited by the design, the drill bit, or the maximum permissible drill diameter for the respective drill motor.

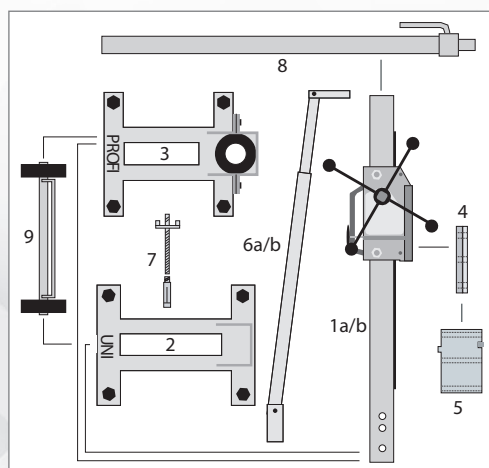

Example application / options P-3000

Pos.	Description	Order no.
1a	drill column P-3000, lifting 610 mm, with carriage without steel dowel foot	30000599
1b	drill column P-3000, lifting 1620 mm, without carriage and steel dowel foot	50009369
2	steel dowel foot version UNI with pivot joint	30000601
3	steel dowel foot version PROFI with swivel and pivot joint	30000602
4	motor mounting plate type C	50005128
5	distance plate type P for drill-Ø extension by 120 mm (60 mm thick)	30000619
6a	telescopic support for drill column with 610 mm lifting, drill-Ø exceeding 300 mm	30000603
6b	telescopic support for drill column with 1620 mm lifting, drill-Ø exceeding 300 mm	30000604
7	DS-350 - dowel set for fixing the drill column	30000667
8	quick-tensioning column for bracing (1,7m - 3,0m, 500 kg loading capacity)	30000593
9	wheel kit universal	30000595