


DRILL COLUMN P-3000



Order No.: 30000599

The particularly versatile P-3000 drill stand is available in four variants. Two sturdy steel dowel feet - Uni or Profi - can be combined with two drill columns of different lengths. By using two different mounting plates, all available Cedima drill motors can be used with the P-3000. The maximum drill diameter is 400 mm.

Technical data		drill column P-3000
Max. drill-Ø	mm	300 (400)
Max. lifting	mm	610 (1620)
diagonal drilling		bis 45° stufenlos
Diagonal drilling	mm	310/220/945 (1945)
dimensions	mm	290/220/1010 (2010)
weight	kg	14,5 / 17
suitable drill motors		C-BMH-160, DK-17EL, C-EBM33FNT, DK-32 EL, C-BMS-350, C-BMS-350, C-BBM33L Extra, C-DX5L, DK-52

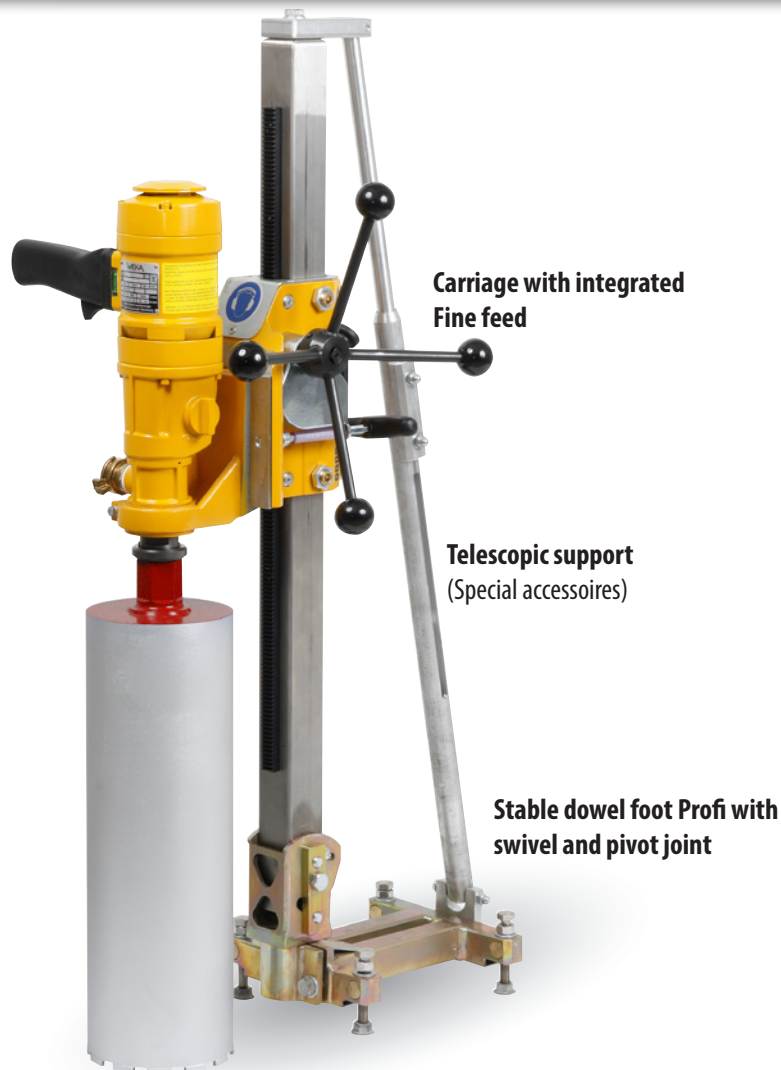

Carriage with integrated Fine feed

Telescopic support
(Special accessoires)


Stable dowel foot Profi with swivel and pivot joint



Dübelfuß Uni mit Schrägbohrgelenk

- Torsion-resistant stainless steel drill column 50 x 50 mm
- Extra wide, high quality rack
- Long carriage for great stability and precision when drilling
- Carriage guidance through heavy-duty, sealed special ball bearings and easily adjustable brass running surfaces
- Integrated swivel joint up to 45° with scale and locking function at 90° position
- Integrated fine feed (1:3) and 4-arm handwheel

Special accessoires
Wheel mounting kit universal for P-3000 on dowel foot Profi

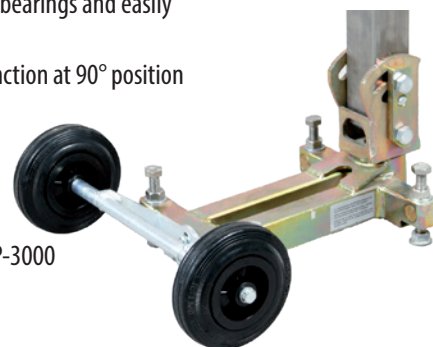

Overview Drill motors - Max. drill diameter*

Drill motor	C-BMH-160	DK-17EL	C-EBM33FNT	C-EBL33L	DK-32 EL	C-BMS-350	C-BBM33L Extra	C-DX5L	DK-52
Max. drill-Ø mm (abrasive)	160	160(230)	150	300	350 (400)	350	400	400	400
	with distance plate type B			with distance plate type C					

*) Additional distance plates may be required

Subject to technical and optical changes and further developments.