


MOTOR MOUNTING PLATES - DISTANCE PLATES

Motor mounting plates distance plates

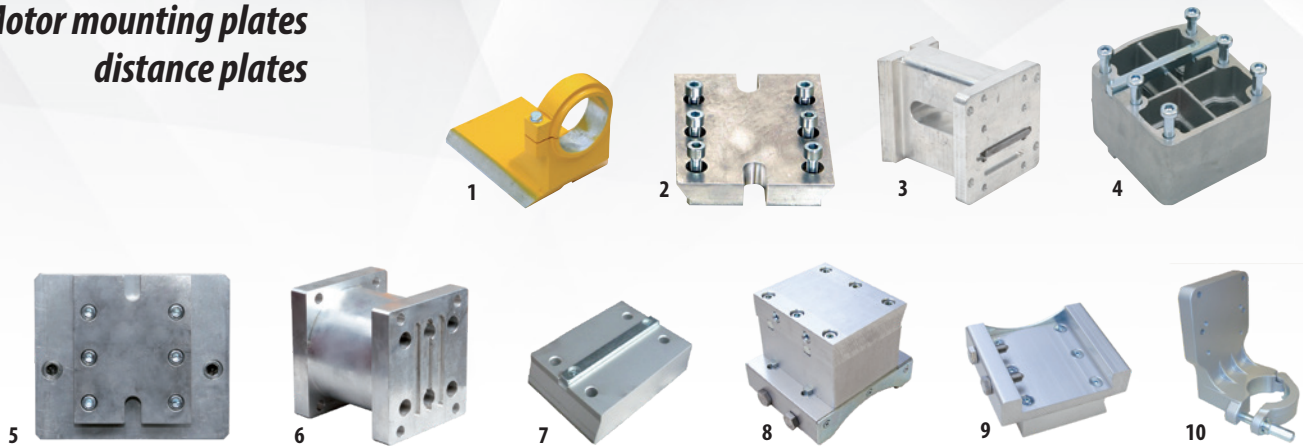

Pos.	Description	Operation with drill column	Order no.
1	mounting plate Type B for drill motors with adapter collar DKS-15, C-BMH-160, C-BM-17	P-3000	30000630
2	mounting plate Type C for drill motors C-BMS-350, C-BM-32, C-BM-32 S, DK-32, DK-52	P-3000, P-6000	50005128
3	combined mounting-distance plate Type K for drill-Ø extension by 300 mm (thickness 170 mm)	P-6000 with drill spindle BSP-3 hydr.	30000627
4	distance plate Type P for drill-Ø extension by 120 mm (thickness 60 mm)	P-3000 und P-6000	30000619
5	mounting plate Type S for BSP-3	P-3000, P-6000 with BSP-3 hydr.	30000629
6	distance plate Type T for drill-Ø > 400-600 mm	BW-400	30000699
7	mounting plate Type U	included in delivery P-250 and P-500	70012073
8	distance plate Type X for drill-Ø extension by 200 mm (thickness 100 mm)	P-500	30001131
9	distance plate Type Y for drill-Ø extension by 90 mm (thickness 45 mm)	P-500	30001129
10	mounting plate Type Z (drill motors with adapter collar) - included in delivery P-250	all in combination with Type C or Type U	30001130

On the CEDIMA H-150 drill column, the mounting for the drilling motors with clamping collar C-BMH-160, DK-17EL, C-EBM33FNT is a fixed component of the guide carriage. No further mounting or distance plates are necessary or possible.

Possible drill motor-plate combinations

Drill motor	Drill column	P-250		P-3000		P-500		P-6000		
		delivery	Type Z and Type U	Plate	Order no.	delivery	Type U	Plate	Order no.	
DKS-15 SP - mounting plate			Type Z	30001130	Type B	30000630				
C-BMH-160 - mounting plate			Type Z	30001130	Type B	30000630				
C-BM-17 - mounting plate			Type Z	30001130	Type B	30000630				
C-BMS-350 - mounting plate			Type U	70012073	Type C	50005128	Type U	70012073	Type C	50005128
Distance plate 45 mm for drill-Ø + 90 mm		--	--	--	--	Type Y	30001129	--	--	
C-BM-32 - mounting plate			Type U	70012073	Type C	50005128	Type U	70012073	Type C	50005128
Distance plate 45 mm for drill-Ø + 90 mm		--	--	--	--	Type Y	30001129	--	--	
Distance plate 120 mm for drill-Ø + 240 mm		--	--	Type P	30000619	--	--	Type P	30000619	
C-BM-32 S - mounting plate			Type U	70012073	Type C	50005128	Type U	70012073	Type C	50005128
Distance plate 45 mm for drill-Ø + 90 mm		--	--	--	--	Type Y	30001129	--	--	
Distance plate 120 mm for drill-Ø + 240 mm		--	--	Type P	30000619	--	--	Type P	30000619	
DK-17 - mounting plate			Type Z	30001130	Type B	30000630				
DK-32 - mounting plate			Type U	70012073	Type C	50005128	Type U	70012073	Type C	50005128
Distance plate 45 mm for drill-Ø + 90 mm		--	--	--	--	Type Y	30001129	--	--	
Distance plate 120 mm for drill-Ø + 240 mm		--	--	Type P	30000619	--	--	Type P	30000619	
DK-52 - mounting plate					Type C	50005128	Type U	70012073	Type C	50005128
Distance plate 45 mm for drill-Ø + 90 mm		--	--	--	--	Type Y	30001129	--	--	
Distance plate 100 mm for drill-Ø + 200 mm		--	--	--	--	Type X	30001131	--	--	
Distance plate 120 mm for drill-Ø + 240 mm		--	--	Type P	30000619	--	--	Type P	30000619	
Distance plate 170 mm for drill-Ø + 300 mm		--	--	--	--	--	--	Type K	30000627	

Note: When selecting the distance plates, please always observe the permissible maximum drill bit Ø of the drill motor.